



2000 sq. ft./gallon

HARD AS NAILS™



Hard Film Floor Finish

This floor finish utilizes highly durable internally cross-linked polymers blended to achieve a harder floor finish film. Our unique chemistry results in an high gloss, long wearing finish that cures faster than any other metal-interlock finish. The perfect labor saving advantage for Educational and Retail facilities which have little or no time for floor burnishing. In addition, this finish resists initial scuffing and daily scuffing to further reduce floor maintenance costs.



Uses

- Resilient tile
- Terrazzo
- Marble

Benefits

- Superior wearing and non-scuffing.
- Self-leveling, self-sealing.
- Resists dirt embedment.


Maintenance

- Low - Medium

Directions For Use

Read the entire label before using this product.

Recommended for use on all types of resilient tile flooring and properly prepared hard surfaces. RESTORATIVE MAINTENANCE: Completely remove all old wax, finish and soil from floor surface following strip procedure instructions on stripper label. Floor surface must be clean, dry and free of residue before finish is applied. Rinse with clean water if necessary. Apply finish in uniform, thin to medium coats using a clean synthetic finish mop or applicator system. Allow each coat to dry thoroughly before applying additional coats, usually 20 - 30 minutes. Elevated temperatures and humidity may extend dry time. 4 - 5 coats of finish are recommended. **Note: This product is a self sealing finish, however, if tile is old, worn or porous, initially applying 1 - 2 coats of a sealer will enhance gloss and long term performance.** ROUTINE MAINTENANCE: Sweep large debris and dust mop (using a water based treatment). Damp mop or automatic scrub using a neutral pH cleaner. Buff or burnish the floor as desired. The use of a cleaner/restorer is recommended to condition the floor and extend the time between top scrub and recoating. INTERIM MAINTENANCE: Sweep large debris and dust mop (using a water-based treatment). Top scrub the floor using a top scrub cleaner and recommended floor pad to remove the top soiled layers of finish. Floor surface must be clean, dry and free of residue before finish is applied. Apply 1 - 2 coats of finish as directed above. **Note: Slip resistance meets or exceeds (ASTM D 2047-04) James Machine 0.5 minimum.**

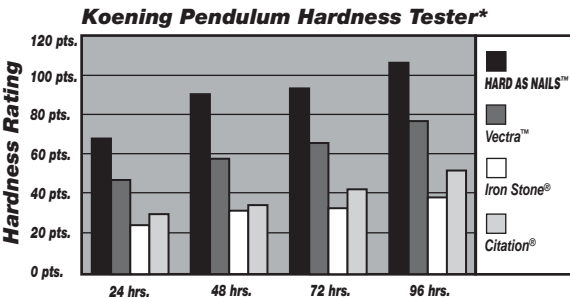

* This information is presented based on our research which we believe to be correct and objective. No guarantee is expressed or implied. Vectra™ is a trademark of SC Johnson. Iron Stone® is a registered trademark of Butcher's. Citation® is a registered trademark of Buckeye International, Inc.

Properties

Color (dried)	Crystal clear
Color (liquid)	White
Coverage	2000 sq. ft./gallon
Dry time	20 - 30 minutes
Fragrance	Mild
Freeze/thaw stability	3 cycles
Gloss (ASTM D1455) One coat	80 - 85
Gloss (ASTM D1455) Two coats	85 - 90
Heel mark resistance	Excellent
Leveling	Excellent
pH	8.1 - 8.9
Solids	>18%
Powdering resistance	Excellent
Recoat	Excellent
Specific gravity	1.026
Recommended coats	4 - 6
Top scrub	2 - 3
Shelf life	1 year

Authorized Betco Distributor

Safety

Keep out of reach of children. For institutional and commercial use. CAUTION: Contains Glycol Ethers. Avoid contact with skin and eyes. Harmful if swallowed. FIRST AID: If splashed on skin or in eyes, flush with large quantities of water. If swallowed, drink two glasses of water. Call a physician. Inhalation: Remove to fresh air. If not breathing, call 911 or ambulance, then administer artificial respiration, preferably mouth-to-mouth.

Available In

- Case/4 - 1 Gallon (3.78 L): Item #65904-00
- Pail/5 Gallon (18.9 L): #65905-00
- QUICKCOAT™ SYSTEM
- Pail/4 - 1.125 Gal. Bags (4.25 L): Item #65945-00
- Drum/55 Gallon (208 L): #65955-00

Literature Item #65992-92

C1010 - Floor Care - Finishes

7.05



The Cleaning Edge™